



HARMONIC STEEL HELIX COVERED BY HIGH TEMP SCUFFSTRIP




CUFF IN BOTH ENDS

SILICON COVERED GLASS FABRIC IN BOTH INTERNAL AND EXTERNAL FACES

LONGITUDINAL SEWING FOR REDUCING THE PRESSURE DROP

APPLICATION: LAID OR ENROLLED FOR EXHAUST EXTRACTION SYSTEMS

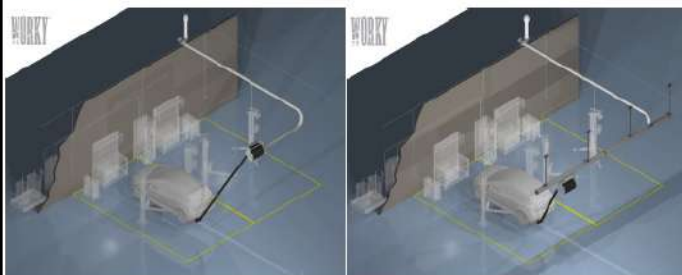

GT3

TECHNICAL DESCRIPTION

Flexible hose made of one aluminized coated fiberglass fabric sewn with one silicone coated both sides by glass fabric, external metal wire sewn with yellow high temperature resistant scuffstrip onto the wall. Each end is reinforced with helix-free cuffs.

WORKING TEMPERATURE FROM -40°C TO +500°C
WORKING TEMPERATURE FROM -40°F TO 575°F

AVAILABLE DIAMETERS

DIAM. 100 mm - 4"
DIAM. 125 mm - 5"
DIAM. 150 mm - 6"
DIAM. 200 mm - 8"

WEIGHT

DIAM 100 mm - 4"	0,70 kg/m	0.44 lb/ft
DIAM 125 mm - 5"	0,80 kg/m	0.54 lb/ft
DIAM 150 mm - 6"	0,95 kg/m	0.64 lb/ft
DIAM 200 mm - 8"	1,30 kg/m	0.88 lb/ft

WORKY

per approvazione / for approval

Note / Notes

Committenza / Final Customer

Progettista / Designer

Distributore / Dealer

Progetto / Project Data / Date

Scala / Scale Rev.

Progettista / Designer

Approvato / Approved

Revisionato / Reviewed

Proprietà riservata - Riproduzione vietata - Tutti i diritti sono riservati - The company reserves all rights on the drawings according to Italian law - Proprieté réservée - Reproduction interdite - Tous droits réservés - The company reserves all rights on the drawings according to Italian law