

GT7




TECHNICAL DESCRIPTION

Flexible hose made of three layers (silica vermiculite, fiberglass HT, fiberglass red silicone) reinforced external metal wire sewn with yellow high temperature resistant scuffstrip onto the wall. Each end is reinforced with helix-free cuffs.

WORKING TEMPERATURE - 60°C + 700°C


HARMONIC STEEL HELIX COVERED BY HIGH TEMP RESISTANT SCUFFSTRIP

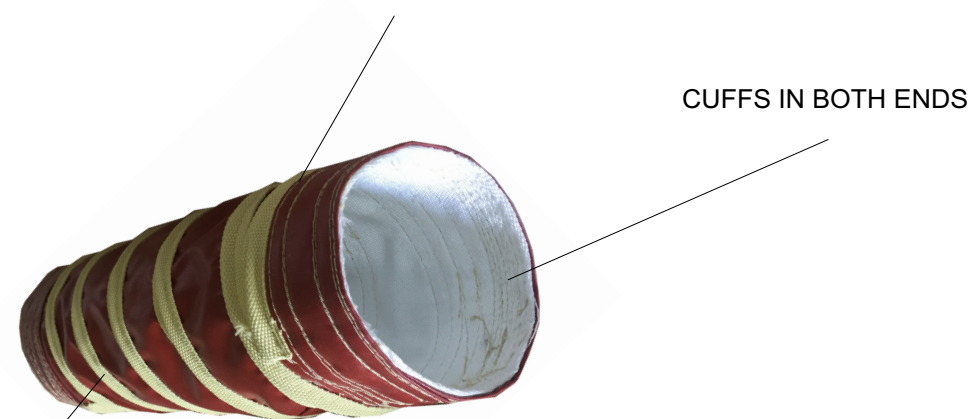

CUFFS IN BOTH ENDS

LONGITUDINAL SEWING FOR REDUCING THE PRESSURE DROP

APPLICACATION: LAID OR ENROLLED FOR EXHAUST EXTRACTION SYSTEMS

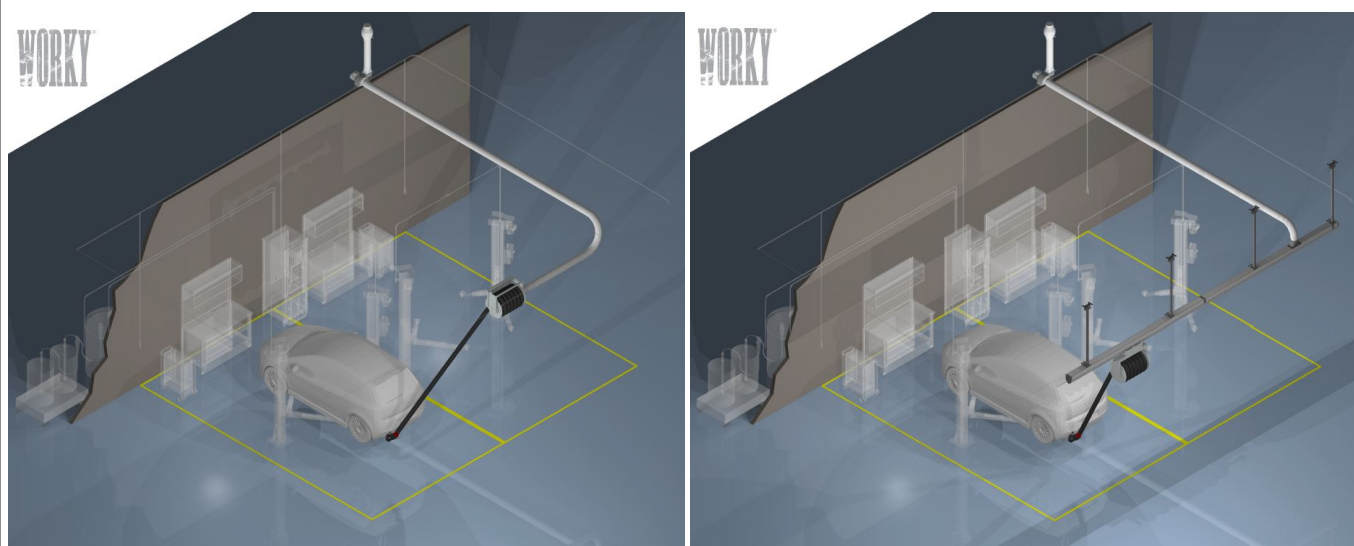

AVALIABE DIAMETERS

DIAM. 100 mm - 4"	(REAL 102 mm int.)
DIAM. 125 mm - 5"	(REAL 127 mm int.)
DIAM. 150 mm - 6"	(REAL 152 mm int.)
DIAM. 200 mm - 8"	(REAL 203 mm int.)
DIAM. 250 mm - 10"	(REAL 254 mm int.)
DIAM. 300 mm - 12"	(REAL 305 mm int.)

BENDING RADIUS

DIAM. 100 mm -	50 mm
DIAM. 125 mm -	67 mm
DIAM. 150 mm -	75 mm
DIAM. 200 mm -	100 mm
DIAM. 250 mm -	125 mm
DIAM. 300 mm -	150 mm

WEIGHT

DIAM. 100 mm -	0,70 Kg/mt
DIAM. 125 mm -	0,80 Kg/mt
DIAM. 150 mm -	0,95 Kg/mt
DIAM. 200 mm -	1,30 Kg/mt
DIAM. 250 mm -	1,50 Kg/mt
DIAM. 300 mm -	1,80 Kg/mt

THE PRODUCT GT7 IS COMPLYANT TO THE FOLLOWING FIRE RESISTANCE NORMS:

NFP 92501 - M1
DIN 4102B1

per approvazione / for approval

Note / Notes

Committenza / Final Customer

Progettista / Designer

Distributore / Dealer

Progetto / Project	Data / Date
---	--- / --- / ---

Scala / Scale	Rev.
1: ---	0

Progettista / Designer

Approvato / Approved

Revisionato / Reviewed